


CORRECT FITTING OF THE SPRING GUIDE IN ASG CZ SCORPION EVO 3 A1, CARBINE AND BET MODELS

When taking advantage of the Evo quick change spring function and when removing or refitting the stock, it is essential to ensure that the spring guide itself is correctly installed.

Failure to do so may result in a failure to function and damage to your gun!

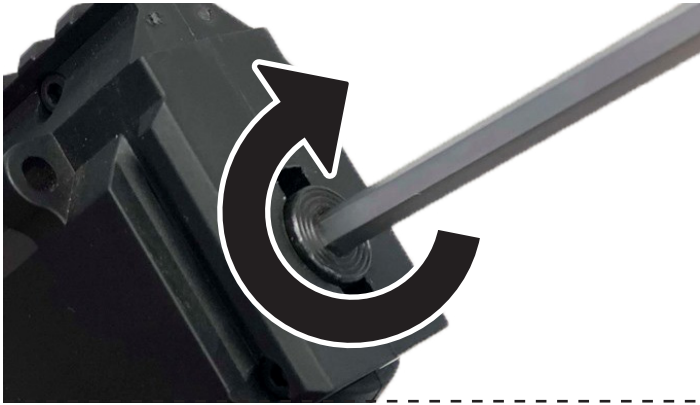

When installing or reinserting the spring guide, the locating tabs on the guide are inserted and the 12 and 6 o'clock positions. The guide should then be rotated through 90 degrees and the tabs should seat in the internal recesses at the 3 and 9 o'clock positions.

When inserted correctly, the spring guide should protrude approximately 1.5mm from the rear of the receiver, as shown.



Failure to seat the locating tabs in their recesses correctly will cause the spring guide to sit too far into the gearbox shell, allowing the guide to impede the rearward motion of the piston, which may cause damage to your gun.



Similarly, when reinstalling the stock, care should be taken to ensure the spring guide is returned to the correct position and is not hindered by the position of the stock mounting plate. Ensure the spring guide is centred within the corresponding opening. This will ensure the stock is fixed in position and also the spring guide is seated correctly, ensuring smooth and correct function of the gun.